


Arrow Board Model # AT154896

Features

- ▶ Jack on Every Corner
- ▶ Double Pulley Winch System
- ▶ 15" Tires
- ▶ Solar-Powered
- ▶ Removable Tongue
- ▶ Lockable Cabinets
- ▶ Auto Dimming
- ▶ Super Bright LED Technology
- ▶ Easy to Operate and Maintain
- ▶ Powder Coat Paint

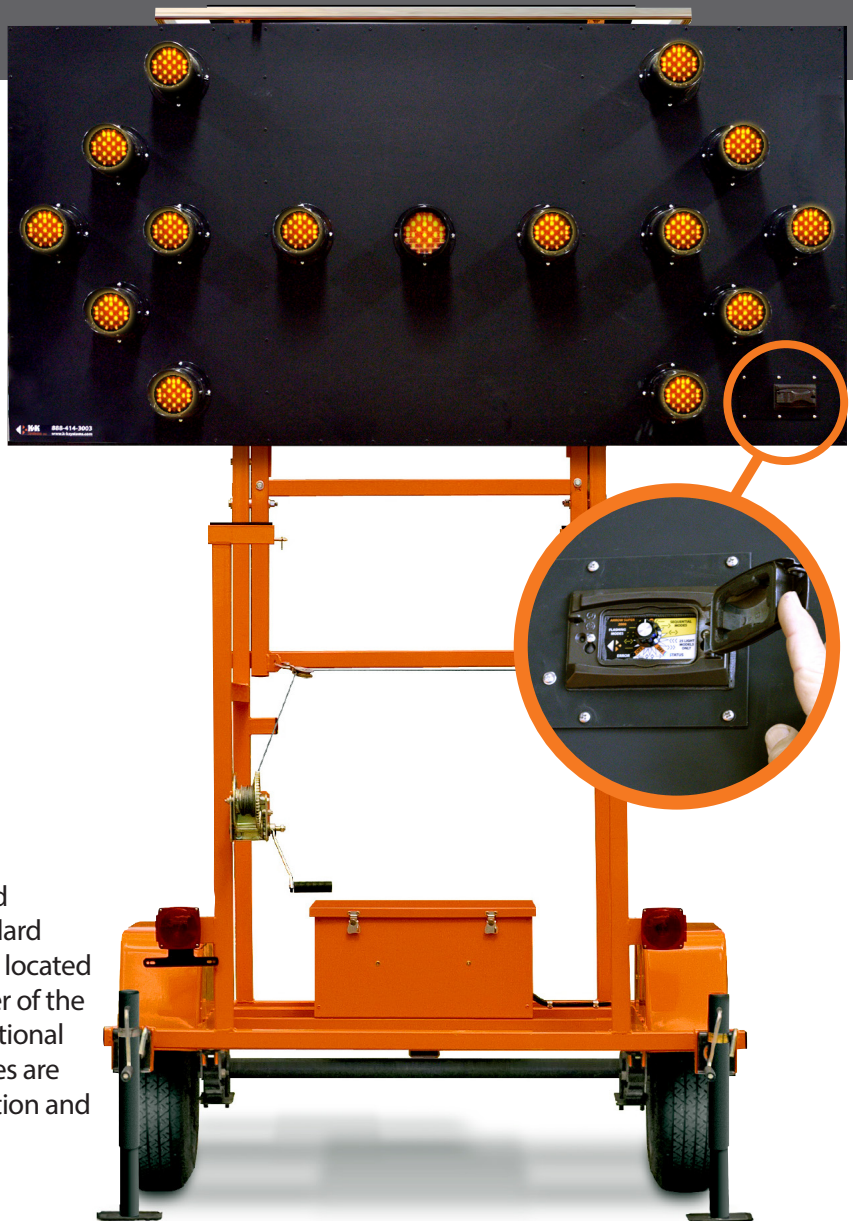

Optional Remotes Available



The K&K Trailer Mounted Arrow Board has a standard built-in controller that is located on the lower right corner of the panel face. However, optional wireless or wired remotes are available for easy operation and mode selection.



Standard 4 Corner Jack System

Unlike most other arrow board manufacturers that use sliding jacks, K&K's arrow board trailers utilize a four corner jack system with side winding jacks to protect knuckles and to make it easier for personnel to setup and leave the unit in the field quickly and safely.

Arrow Board Trailer - General Specifications

Model # AT154896

Trailer

Width: 68"

Length with Tongue: 104"

Length without Tongue: 57"

Transport Height: 87"

Salt Spray: 1,000 hours

Paint: Powder Coat

Main Frame: 2" x 2" x 1/8" tubular steel

Wheels: 15"

Axle: 1,500 lbs leaf spring

Fenders: 16 gauge

Jacks: (4) adjustable corner jacks

Hitch: 2" ball, 1/4" safety chains with hooks

Arrow Panel Lift: Gear ratio: 4:1, Load Capacity: 1200 lbs.,
Reel Capacity: 58 ft.


Battery/Control Cabinet: Steel fabrication, lockable,
hinged, and vented

Controller

Battery Status Indicator Light: Indicates if solar is charging and progress. Multi-color LED indicates the battery condition (low, fair, or good).

Error LED: Indicates low voltage disconnect, low voltage disconnect 2, or over voltage condition

Mode Selector: Capable of 8 modes in 15 lamp configuration or 13 modes in 25 light configuration as shown below.

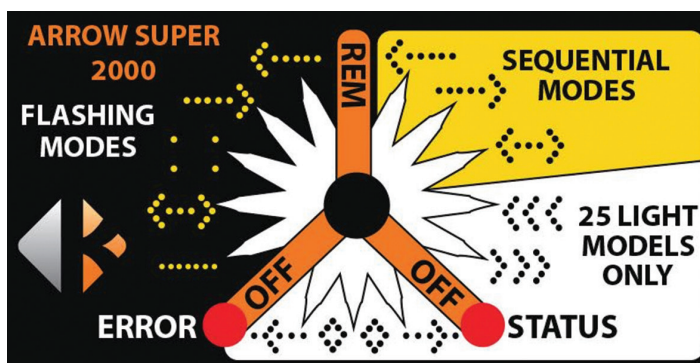

Sign Display

Construction: 0.80 aluminum frame 48" x 96"

Cross Members: 0.63 aluminum front & back panel 48" x 96"

Paint: Black powder coat paint

Salt Spray: 1000 hours

UV Resistant: 500 hours

Seal: Weather resistant

Length: 96"

Width: 48"

Depth: 3 3/8"

Visibility: 4800 feet

Raising and Lowering of Display: Winch

Flash Rate: 30-40 flashes per minute

LED's: (15) yellow/amber Par 46 LED's

Visor: 360 degree plastic high impact

Power and Charging

Batteries: (1) 12 volt 100 amp battery

Solar: (1) 40 watt solar panel

On-board Diagnostics to Monitor: Solar, battery, and load

Regulator: Built-in Controller with low voltage & high voltage disconnect.

Options

- ▶ Locking Lug Nuts
- ▶ Tongue Jack
- ▶ 3-Mode Indicator Lights
- ▶ Custom Paint
- ▶ 7-Way Round Trailer Plug
- ▶ Tow Plate
- ▶ Pintle Ring or Bulldog Hitch
- ▶ Wired Remote
- ▶ Battery Charger
- ▶ Wireless Remote
- ▶ Diamond Plate Floor
- ▶ Other option available
- ▶ Hour Meter